



44KRCMK

Ride Command Upgrade Audio Kit

WARRANTY INFORMATION:

All SSV Works enclosures are covered by a limited lifetime warranty against defects in material or workmanship. All SSV Works Electronics are covered by a limited 1 year warranty against defects in material or workmanship. All Kicker Speakers are covered by a limited 1 year warranty against defects in material or workmanship. All Kicker Amplifiers are covered by a limited 2 year warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. Contact SSV Works for further warranty information.



Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.

TOOLS NEEDED FOR INSTALLATION

- Phillips & Flathead Screwdriver
- Threadlocker (recommended)

PARTS LIST IMAGES




1. Amp Tray




2. B-H1810 Harness for the 300.4




3. B-H1811 Harness for the 500.1

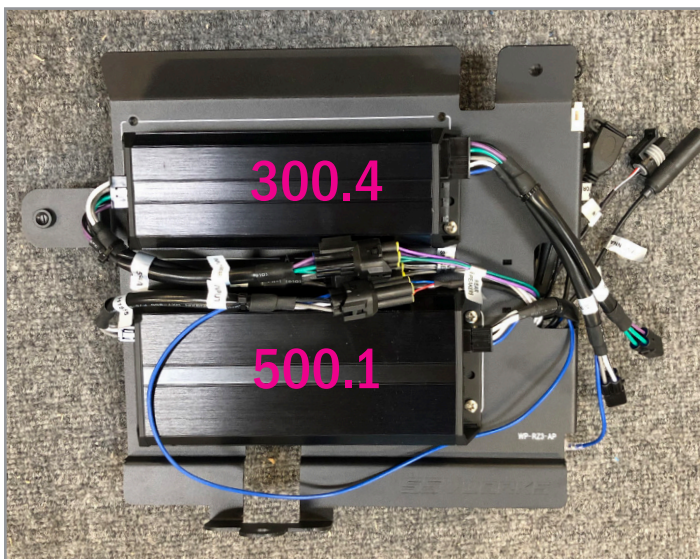

A. On the 300.4 amp, compress the locking tabs and pull the connectors to disconnect harnesses from the amplifier.

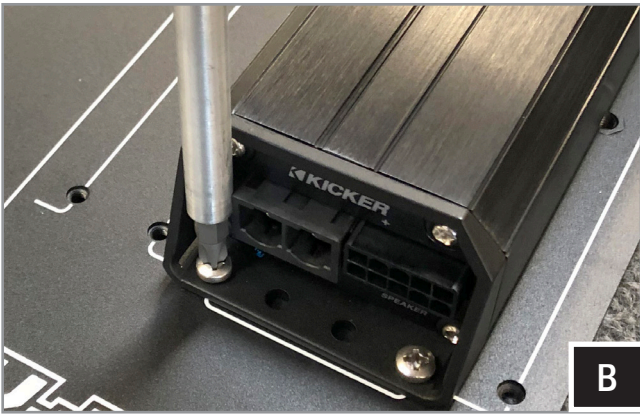


B. With the amplifier disconnected, unscrew the (4) screws that secure the amp to the amp tray.

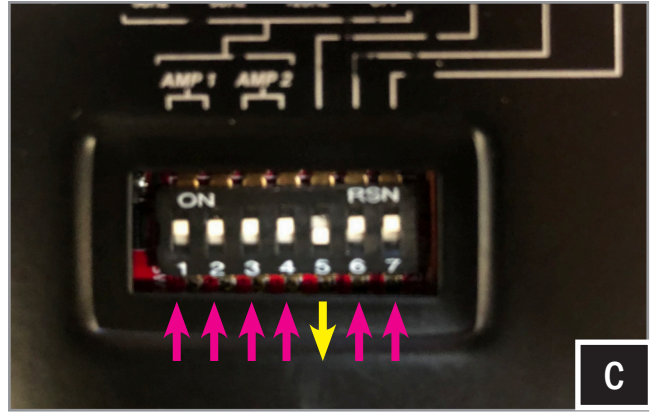


C. On bottom side of the 300.4 amp, remove switch cover, and set switch levels to match.



D. Remove gain control plugs, starting from zero adjust gain control clock wise to the position shown. Once tuned re-insert plugs and switch cover.

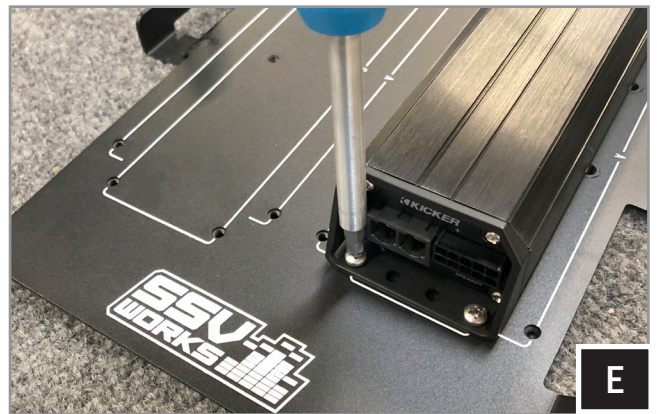

E. Transfer the 300.4 amp to the Ride Command compatible amp tray. Fasten the amp to the tray with your existing M4 hardware. We recommend applying Threadlocker.

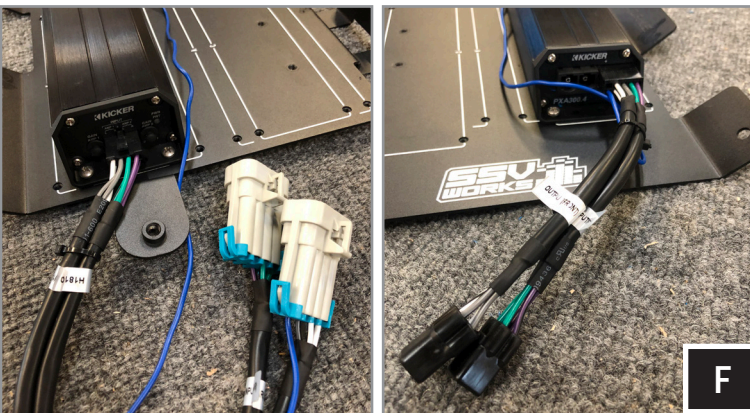


F. Connect harness B-H1810 to the 300.4. The 8-pin connector to the input side of the amp and 10-pin connector to the output side of the amp.



G. On the 500.1 amp, compress the locking tabs and pull the connectors to disconnect harnesses from the amplifier.



H. With the amplifier disconnected, unscrew the (4) screws that secure the amp to the amp tray.

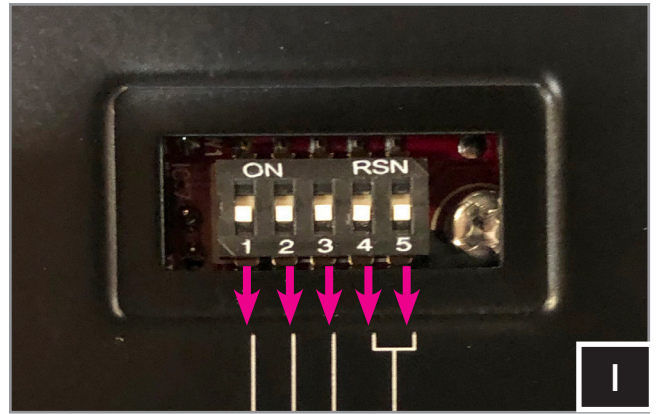

I. On bottom side of the 500.1 amp, remove switch cover, and set switch levels to match.



J. Remove gain control plug, starting from zero adjust gain control clock wise to the position shown. Once tuned re-insert plugs and switch cover.



K. Transfer the 500.1 amp to the Ride Command compatible amp tray. Fasten the amp to the tray with your existing M4 hardware. We recommend applying Threadlocker.

NOTE: the power/ ground, and speaker outputs of both amps face toward the white SSV logo on the tray.



L. Connect harness B-H1811 to 500.1. The 4-pin connector to the input side of the amp and 6-pin connector to the output side of the amp.

Follow standard kit instruction for installation of the Ride Command compatible amp tray